

3 BASSHABIT



BASS
HABIT

ELITE

SE3100.1DF

PRODUCT CATALOGUE

Q2 2026

BRUTAL BASS FOR THE BUCK!

Call us rebels, call us bass addicts. Call us whatever.
We're loud and proud to make bass a deep habit!

REBEL

With the Rebel series, you can expect superior performance without having to exceed your budget. Whether you want to enhance the bass, invest in a more powerful subwoofer, or have a versatile four-channel amplifier, there is something for you in this series.

Play

The Play series is designed to keep the price down, without sacrificing quality and performance. The result is a great-sounding product at a really good price, with high-quality components.

ELITE

The Elite series is built to handle anything you throw its way with ease. Experience powerful sound, unrivaled quality, and innovative solutions – all at a price that won't break the bank.

BASS HABIT *REBEL*



SR200M

8"/20cm SPL Midrange driver
130W MAX, 65W RMS, 4 Ohm,
Freq. range 95Hz - 10 000Hz.



SR165M

6,5"/16,5cm SPL Midrange driver
120W MAX, 60W RMS, 4 Ohm, Freq.
range 100Hz - 10 000Hz.



SR25T

1"/2,5cm SPL Bullet Tweeter
80W MAX, 40W RMS, 4 Ohm,
Freq. range 4000Hz - 20 000Hz.



R690

6x9" 3-way coaxial speaker
120W MAX, 60W RMS, 4 Ohm,
Freq. range 60Hz - 20 000Hz.



R165C

6,5"/16,5cm component kit
120W MAX, 60W RMS, 4 Ohm,
Freq. range 73Hz - 20 000Hz.



R165

6,5"/16,5cm 2-way coaxial speaker
120W MAX, 60W RMS, 4 Ohm,
Freq. range 75Hz - 20 000Hz.



NEW!

R130

5,25"/13cm 2-way coaxial speaker
100W MAX, 50W RMS, 4 Ohm,
Freq. range 90Hz - 20 000Hz.



NEW!

R100

4"/10cm 2-way coaxial speaker
80W MAX, 40W RMS, 4 Ohm,
Freq. range 105Hz - 20 000Hz.



R25T

1"/2,5cm Tweeter
80W MAX, 40W RMS, 4 Ohm,
Freq. range 4000Hz - 22 000Hz.

BASS HABIT *REBEL*

NEW!



RA3600W

Class D Mono Amplifier

- 1x3600W MAX @ 1 Ohm
- 1x2400W MAX @ 2 Ohm
- 1x1400W MAX @ 4 Ohm



RA2000W

Class D Mono Amplifier

- 1x2000W MAX @ 1 Ohm
- 1x1300W MAX @ 2 Ohm
- 1x800W MAX @ 4 Ohm



RA1200W

Class D Mono Amplifier

- 1x1200W MAX @ 1 Ohm
- 1x800W MAX @ 2 Ohm
- 1x460W MAX @ 4 Ohm



RA500W

Class AB 2-channel Amplifier

- 2x250W MAX @ 2 Ohm
- 2x150W MAX @ 4 Ohm
- 1x500W MAX @ 4 Ohm



RA800W

Class AB 4-channel Amplifier


- 4x200W MAX @ 2 Ohm
- 4x120W MAX @ 4 Ohm
- 2x400W MAX @ 4 Ohm



SRE62

2x6,5" SPL enclosure

Loaded 2x6,5"/16,5cm (with 2x1"/2,5cm tweeters) enclosure, 400W MAX, 200W RMS, 4+4 Ohm impedance.

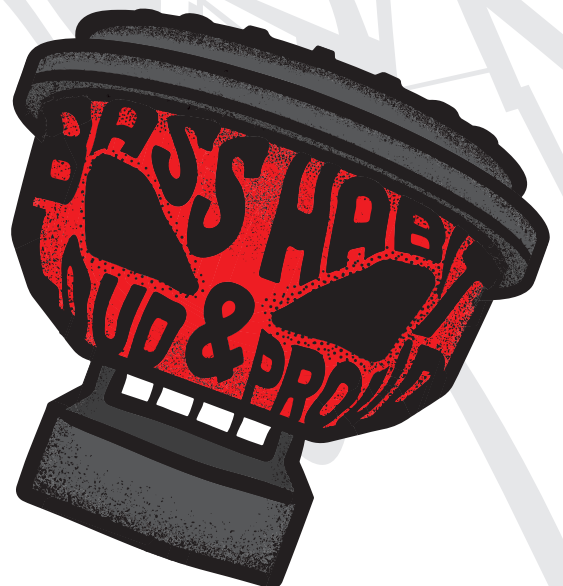

BASS HABIT *Play*



SP250M

10"/25cm SPL Midrange driver
100W RMS, 250W MAX, 4 Ohm,
Freq. range 50Hz - 5 000Hz.



SP200M

8"/20cm SPL Midrange driver
75W RMS, 200W MAX, 4 Ohm,
Freq. range 85Hz - 8 000Hz.



SP165M

6,5"/16,5cm SPL Midrange driver
75W RMS, 200W MAX, 4 Ohm,
Freq. range 110Hz - 15 000Hz.



SP35H

1,34"/3,4cm SPL Horn Tweeter
75W RMS, 150W MAX, 4 Ohm,
Freq. range 2500Hz - 20 000Hz.



SP25A

1"/2,5cm SPL Horn Tweeter
40W RMS, 80W MAX, 4 Ohm,
Freq. range 3000Hz - 20 000Hz.



P690

6x9" 3-way coaxial speaker
60W RMS, 120W MAX, Freq. range
59Hz - 20 000Hz, grille included.



P165

6,5"/16,5cm 2-way coaxial speaker
60W RMS, 120W MAX, Freq. range
70Hz - 20 000Hz, grille included.



P130

5,25"/13cm 2-way coaxial speaker
50W RMS, 100W Max, Freq. range
89Hz - 20 000Hz, grille included.



P100

4"/10cm 2-way coaxial speaker
40W RMS, 80W MAX, Freq. range
104Hz - 20 000Hz, grille included.

BASS HABIT *Play*



P165C

6,5"/16,5cm component speaker
60W RMS, 120W MAX, Freq. range
73Hz - 20 000Hz, grille included.



SPL64

4x6,5" SPL enclosure
Loaded 4x6,5"/16,5cm (with 2x1"/
2,5cm tweeters) enclosure, 360W
RMS, 880W MAX, 2+2 Ohm imp.



SPL84

4x8" SPL enclosure
Loaded 4x8"/20cm (with 2x1"/
2,5cm tweeters) enclosure, 380W RMS,
960W MAX, 2+2 Ohm impedance.

NEW!



SP12001FR

Class D Full Bridge Amplifier

- 1x1210W RMS @ 1 Ohm
- 1x850W RMS @ 2 Ohm
- 1x500W RMS @ 4 Ohm

NEW!



SP31001FR

Class D Full Bridge Amplifier

- 1x3120W RMS @ 1 Ohm
- 1x1800W RMS @ 2 Ohm
- 1x1000W RMS @ 4 Ohm

NEW!



SP5504FR

Class D Full Bridge Amplifier

- 4x320W RMS @ 2 Ohm
- 4x200W RMS @ 4 Ohm
- 2x640W RMS @ 4 Ohm



BASS HABIT *Play*



PL300

12"/30cm Subwoofer
200W RMS, 400W MAX, 4 Ohm impedance, 88dB sensitivity.



PL212

2x12" subwoofer enclosure
Loaded 2x12" subwoofer enclosure, 400W RMS, 800W MAX, 1 / 2x2 / 4 Ohm impedance.



PL2212SR

2x12" subwoofer enclosure
Loaded 2x12" subwoofer enclosure, 500W RMS, 1000W MAX, 1 / 2x2 / 4 Ohm impedance.



PL112A

1x12" subwoofer enclosure
Loaded 1x12" subwoofer enclosure (active), 150W RMS, 300W MAX.



PL212A

2x12" subwoofer enclosure
Loaded 2x12" subwoofer enclosure, (active), 250W RMS, 500W MAX,



P8A

1x8" subwoofer enclosure
Loaded 1x8" subwoofer enclosure (active), 100W RMS, 200W MAX.



BASS HABIT ELITE



SE250M

10"/25cm SPL Midrange driver
250W RMS, 500W MAX, 4 Ohm,
Freq. range 65Hz - 5 000Hz.



SE2200M

8"/20cm SPL Midrange driver
250W RMS, 500W MAX, 4 Ohm,
Freq. range 90Hz - 6 500Hz.



SE200M

8"/20cm SPL Midrange driver
200W RMS, 400W MAX, 4 Ohm,
Freq. range 90Hz - 8 000Hz.



SE165M

6,5"/16,5cm SPL Midrange driver
150W RMS, 300W MAX, 4 Ohm,
Freq. range 100Hz - 10 000Hz.



SE245T

1,75"/4,5cm SPL Horn Tweeter
200W RMS, 400W MAX, 4 Ohm,
Freq. range 2500Hz - 20 000Hz.



SE45T

1,75"/4,5cm SPL Horn Tweeter
200W RMS, 400W MAX, 4 Ohm,
Freq. range 2500Hz - 20 000Hz.



SE690CX

6x9" 3-way coaxial speaker
180W RMS, 360W MAX, Freq. range
90Hz - 20 000Hz.



SE200CX

8"/20cm 2-way coaxial speaker
200W RMS, 400W MAX, Freq. range
90Hz - 20 000Hz.



SE165CX

6,5"/16,5cm 2-way coaxial speaker
60W RMS, 120W MAX, Freq. range
70Hz - 20 000Hz.

BASS HABIT ELITE



SE8000.1D1/D2

Class D Mono Amplifier

- 1x8000W RMS @ 1 Ohm
- 1x5000W/8000W RMS @ 2 Ohm
- 1x3000W/5000W RMS @ 4 Ohm



SE5100.1DF

Class D Mono Amplifier

- 1x5100W RMS @ 1 Ohm
- 1x3100W RMS @ 2 Ohm
- 1x2100W RMS @ 4 Ohm



SE3100.1DF

Class D Mono Amplifier

- 1x3100W RMS @ 1 Ohm
- 1x1900W RMS @ 2 Ohm
- 1x1050W RMS @ 4 Ohm



SE2100.1DF

Class D Mono Amplifier

- 1x2100W RMS @ 1 Ohm
- 1x1450W RMS @ 2 Ohm
- 1x850W RMS @ 4 Ohm



SE1200.1DF

Class D Mono Amplifier

- 1x1200W RMS @ 1 Ohm
- 1x800W RMS @ 2 Ohm
- 1x500W RMS @ 4 Ohm



SE850.2DF

Class D 2-channel Amplifier

- 2x850W RMS @ 1 Ohm
- 2x610W RMS @ 2 Ohm
- 2x500W RMS @ 4 Ohm



SE225.4DF

Class D 4-channel Amplifier

- 4x225W RMS @ 1 Ohm
- 4x130W RMS @ 2 Ohm
- 4x75W RMS @ 4 Ohm



SE550.4DF

Class D 4-channel Amplifier

- 4x550W RMS @ 1 Ohm
- 4x310W RMS @ 2 Ohm
- 4x200W RMS @ 4 Ohm



SE2200.5DF

Class D 5-channel Amplifier

- 1x1000W RMS @ 1 Ohm (CH5)
- 4x300W + 1x550W RMS @ 2 Ohm
- 4x200W + 1x300W RMS @ 4 Ohm

BASS HABIT ELITE



E300D1

12"/30cm Subwoofer
1000W RMS, 2000W MAX, 2x1 Ohm impedance, 84.1dB sensitivity.



E300D2

12"/30cm Subwoofer
1000W RMS, 2000W MAX, 2x2 Ohm impedance, 84.5dB sensitivity.

BASS HABIT HEAD UNIT



DMR10BT

- 1 DIN short chassi
- MOSFET 4x50W MAX
- Bluetooth 5.3
- 1.5A charge for smartphone
- Internal microphone
- ISO connector included

BASS HABIT MERCH



STICKERS

A wide range of Bass Habit stickers that will make your car's look match your great sound system.

SUNGLASSES

Do not let the sunlight ruin your cruising trip. Get a good look at the road while you look good!

CAP

Match your car with this stylish Bass Habit cap and let everyone see that you are a proud fan.



Bass Habit is a registered trademark by Winn Scandinavia AB and is protected by relevant laws and jurisdictions such as Copyright © and Trademark™ laws.

