

REBEL

RA1200W



1200W





D
Class

- ③ 1 channel amplifier, Class D
- ③ Great price vs performance ratio
- ③ Heavy and efficient heatsink for "Best in class" reliability & performance
- ③ Variable 12dB / Octave crossovers
- ③ 4 Way Protection Circuit
- ③ Remote subwoofer level control included

Product Specifications

| | |
|------------------|--------------------------|
| Total Power: | 1200W MAX |
| Power (1 ohm): | 1x600W RMS * |
| Power (2 ohm): | 1x400W RMS * |
| Power (4 ohm): | 1x230W RMS * |
| S/N ratio: | 90dB |
| Freq. response: | 15Hz - 250Hz |
| Low Pass filter: | 32Hz - 250Hz |
| Subsonic filter: | 15Hz - 50Hz |
| Bass boost: | 0 - 12 dB (45Hz) |
| Input adjustment | 0.2V - 6V |
| Voltage: | 10V - 16V |
| Protect: | Short Circuit protection |
| | Overload protection |
| | DC protection |
| | Thermal protection |

* RMS Power at 14.4 V, THD 1%

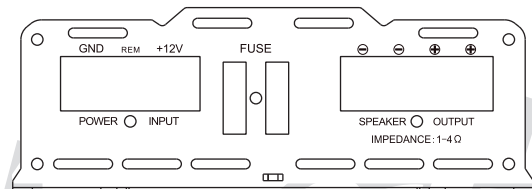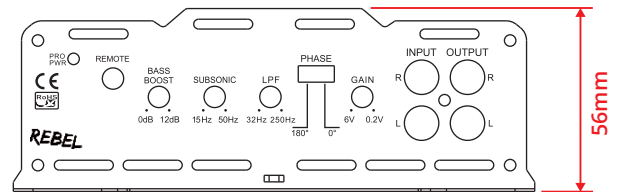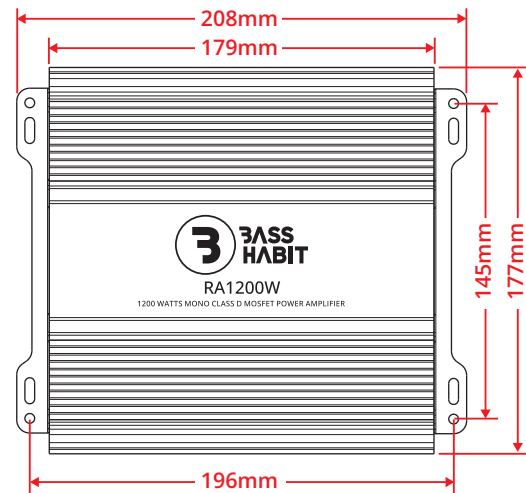

| Recommended 12V+ cable | Recommended REM cable | Recommended GND cable | Recommended fuse rating |
|---------------------------|-----------------------------------|---------------------------|-------------------------|
| 4 AWG / 20mm ² | 18-10 AWG / 0.75-6mm ² | 4 AWG / 20mm ² | 80A |